
Permanent Split Capacitor Condenser Fan
5.6" Diameter, Totally Enclosed, Air Over (TEAO)

APPLICATIONS:

Residential and commercial condensing unit fan motors in extreme temperature locations.

FEATURES:

- 158°F (70°C) Ambient Design
- Ball Bearings Have All Angle Thrust System
- Class F Insulation
- Designed For Use With 370V Capacitors
- Extended Studs
- 48" Leads
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty

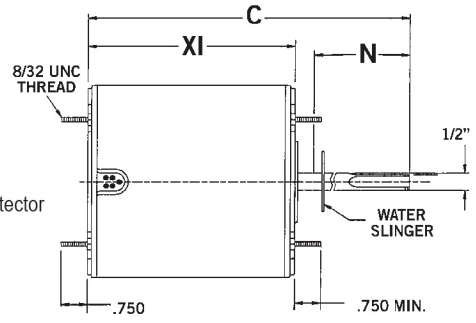

Stud Mount, Without Capacitor, Extreme High Ambient Design, All Angle Mount

HP	RPM/ Spd.	Voltage	Catalog Number	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt.
1/8	825	208-230	1872H	5.0	0.78	6.0	4.3	10.6	13.7
1/6	825	208-230	1873H	5.0	1.2	6.0	4.3	10.6	17.0
	1075	208-230	1859H	5.0	1	5.0	4.0	9.4	18.1
1/4	1075	208-230	1860H	5.0	1.7	6.0	4.1	10.6	12.0
1/4-1/8	825	208-230	1874H	5.0	2.1	6.0	4.4	10.9	13.0
1/3-1/6	825/2	208-230	5464H*	7.5	1.9	5	5.3	10.3	18
	1075/2	208-230	5462H*	5.0	2.6	5	4.6	9.6	14
	1075	208-230	3323H	7.5	2.0	5	4.3	9.3	14
1/3	1075	208-230	1861H	7.5	2.1	6.0	4.6	11.1	14.0
1/3-1/5	825	208-230	1875H	7.5	2.4	6.0	5.3	11.6	17.0
1/2-1/5	1075/2	208-230	5465H*	10.0	3	5	5.3	10.3	19
1/2	1075	208-230	1862H	10.0	3.2	6.0	5.3	11.9	18.0
	825	208-230	1870H	10.0	3.3	6.0	6.1	12.4	17.0
3/4	1075	208-230	1868H	10.0	4.7	6.0	5.8	12.4	20.0
3/4-1/4	1075/2	208-230	5482H*	15.0	4	5	6.3	11.875	-

460 Volt

HP	RPM/ Spd.	Voltage	Catalog Number	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt.
1/4	1075	460	3736H	7.5	0.8	6	4.8	11.1	18.1
1/3	1075	460	3737H	7.5	1.3	6	5.6	11.9	18.1
1/2	1075	460	3738H	10	1.5	6	5.8	12	18.1
1/2-1/6	1075	460	5480H*	10	1.3	5	5.562	11.1	19
3/4	1075	460	3742H	10	2	6	6.6	12.9	18.1
3/4-1/4	1075	460	5481H*	15	2.2	5	6.3	11.857	22